



# 0-10V Dimmable LED Drivers—LKAD012V-C

## —产品特性/Feature—

- 110-240VAC (50/60Hz) 输入 / 110-240VAC (50/60Hz) Input
- 隔离高PF无频闪方案，。采用最新的调光信号与主输出的隔离调光认证方案 No stroboscopic scheme for high PF isolation, . Using the latest dimming signal and main output isolation dimming certification scheme
- 高效率、高功率因素，高稳定性，高调光比 High efficiency, high power factor, high stability, high light ratio
- 短路保护，过流保护，过压保护，过温保护 / Short circuit, over voltage, over current and over temperature protection;
- 独立外置，Class II 恒流类型 / independent, Class II constant current type;
- 防护等级 IP20 / degree of protection IP20;
- 实现了真正的0-10V调光，全程无频闪，兼容市场上所有的调光控制系统。 It realizes true 0-10V dimming, no flicker in the whole process, and is compatible with all dimming control systems in the market.
- 3年质保期 / 3 years warranty.



## 产品参数/Specification

Model		LKAD012V-C	备注
输入 Input	输入电压范围/Input Voltage range	110-240V	
	频率/Frequency	50/60hz	
	谐波/THD	≤10%/240VAC	
	功率因数/Power factor	0.5/240VAC	
	输入电流 Input current (mA)	140MA/230V	
	待机功耗 stand_by power	≤1W	
	浪涌电流 Inrush Current (Max. )	≤30A@240VAC	
	漏电流 Leakage Current	<1MA/240V	
输出 Output	额定电压/Rated voltage	12V	
	空载电压/No-load Voltage	≤12V	
	工作电压范围/working voltage range	12V	
	可选择电流规格 /selectable current	1250MA	
	电流精度/Current precision	(+/-) 2%	
	额定功率/Rated power	15W	
	开机延时/Setup Time	≤0.5s/230VAC	
	输出线性调整率Output Line Regulation	±5%	
	温度漂移temperature drift	±10%	


保护特性	开路保护Output open circuit protection	有/Enable	
	短路保护Short Circuit Protection	打嗝模式/Hiccup mode	
使用环境 Environment Requirement	工作温度/湿度要求 Operating Temp./RH	-30~+45℃/20~95%	
	储存温度,湿度要求 Storage Temp./RH	-40~+80℃/10~95%	
安全和电磁兼容 Safety & EMC	认证编号/Certificate	符合CE/ meet CE	
	耐压 withstand voltage	3750VAC/60S	
	绝缘阻抗insulation resistance	500V>100M	
	浪涌等级EMS immunity	IEC6100-4-5 (L-N:1KV)	
	安规标准Safety standard	IEC61347-2-13 EN6147-2-13	
	电磁干扰electromagnetic interference	Fcc Part15B	
	电磁抗干扰 Electromagnetic	Fcc Part15B	
其他 Others	IP等级说明 IP level description	IP20	
	质保说明Warranty instructions	3年/3 years	
	尺寸/Size	100*40*26	
	重量/Netweight	100g	
注意事项 matters needing attention	<p>1. 建议客户在灯具供电回路中安装过欠压保护与浪涌保护装置, 以确保用电安全 1. pls suggest the client to instal the unde voltage protection device and surge protection device to ensure Electricity safety</p> <p>2. 电源作为整灯灯具中的一个零部件与终端设备结合使用, 因EMC性能受LED灯具及走线的影响, 终端设备制造商需对整套装置重新进行EMC确认。 2. The power supply is considered a component which will be installed a final equipment. The final equipment must be re-confirmed that it still meets EMC directives.</p> <p>3. 客户在使用电源时, 注意电源通风散热和环境温度, 超过TA时要做降额使用 3. Becareful of ambient temperature and heat dissipation during the client use this unit, When exceeding TA, the power supply shall be derated</p>		

### 测试数据/Test data


输入电压 Input voltage ( Vac)	输入电流 Input current ( mA)	输入功率 Input power ( W)	功率因数 PF	输出电压 Output voltage ( Vdc)	输出电流 Output current ( mA)	输出功率 Output Power ( W )	转换效率 Efficiency (%)
240V	141.50	17.78	0.525	11.75	1250	14.69	83%
	95.53	11.52	0.503	11.77	800	9.42	82%
	63.74	7.32	0.478	11.78	500	5.89	80%
	30.49	3.11	0.425	11.79	200	2.36	76%
	8.71	0.31	0.148	11.81	0	0.00	0%
110V	254.80	17.81	0.583	11.73	1250	14.66	82%
	174.60	11.34	0.542	11.76	800	9.41	83%
	119.00	7.12	0.498	11.77	500	5.89	83%
	54.38	2.96	0.453	11.79	200	2.36	80%

110V	7.18	0.24	0.277	11.79	0	0.00	0%
------	------	------	-------	-------	---	------	----


输入电压 Input voltage (Vac)	输入电流 Input current (mA)	输入功率 Input power (W)	功率因数 PF	输出电压 Output voltage (Vdc)	输出电流 Output current (MA)	输出功率 Output Power (W)	调光电压 Dimming voltage (V)	百分比	
240V	8.54	0.3	0.144	6.690	0.00	0.00	0V	0.00%	0
240V	8.90	0.37	0.170	6.720	4.00	0.03	0.5V	0.32%	1
240V	9.35	0.44	0.196	6.750	9.00	0.06	1V	0.72%	2
240V	10.15	0.58	0.235	6.790	18.00	0.12	2V	1.44%	3
240V	12.01	0.84	0.288	6.860	35.00	0.24	3V	2.80%	4
240V	20.34	1.89	0.383	7.140	105.00	0.75	4V	8.40%	5
240V	32.96	3.4	0.429	7.590	217.00	1.65	5V	17.36%	6
240V	50.38	5.52	0.457	8.210	370.00	3.04	6V	29.60%	7
240V	70.35	7.93	0.471	8.900	544.00	4.84	7V	43.52%	8
240V	92.13	10.74	0.485	9.700	745.00	7.23	8V	59.60%	9
240V	113.70	13.57	0.497	10.520	947.00	9.96	9V	75.76%	10
240V	145.50	17.86	0.511	11.620	1250.00	14.53	10V	100.00%	11

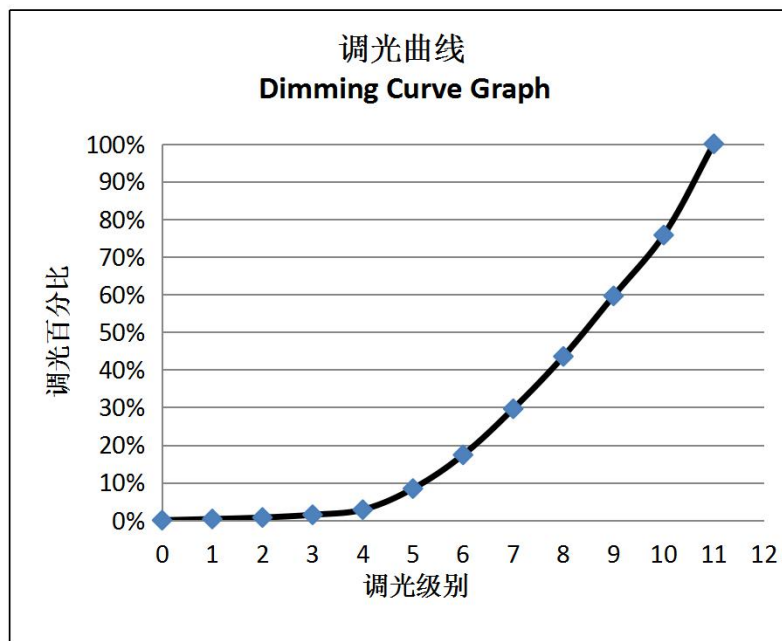

## 产品尺寸图/ Product Size Diagram

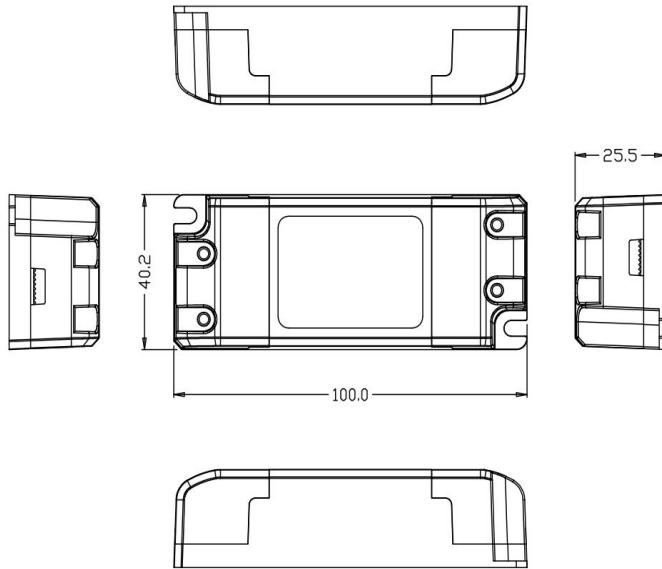

## 产品接线示意图/ Product Connection Diagram

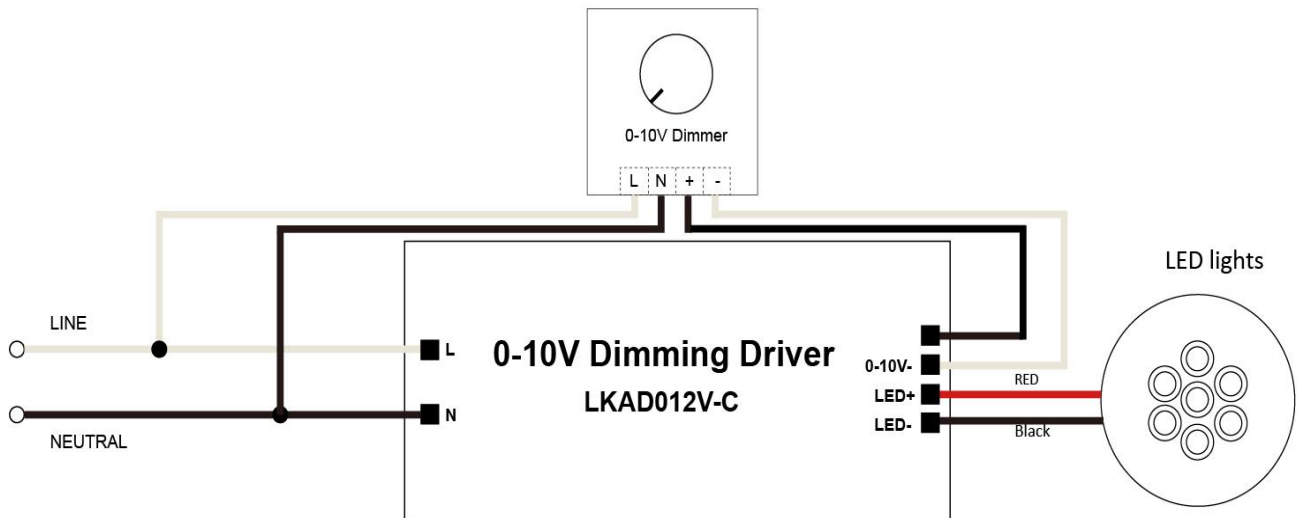

## 备注/Note:

"1. 所有没提及到的参数都是在230V输入，额定负载和在周围温度为25°C的情况下测试的；  
All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25 of ambient temperature;

2.注意接线的方向，不要搞反输入和输出端.

Pay attention to the direction of wiring, do not reverse the input and output terminals,.

# 广东领冠智能科技有限公司

Guangdong Linkuan Smart Tech Co.,Ltd.

地 址：广东省东莞市万江区大莲塘工业区3号

Address: NO.3 Building, Daliantang Industrial Park,  
Wanjiang

District,Dongguan,Guangdong,China

Tel:+86-769-23129651

Fax:+86-23129652